




> PROGRESS 1000

TECHNICAL SPECIFICATIONS

MAIN FEATURES	
Construction	Frame: Galvanised Steel; Double Coated Painting
	Housing: Stainless Steel
	Panels: Aluminium; Double Coated Painting
Admission	Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump
Meter	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration
Filters	Reusable Stainless Steel, 100 µm mesh
Motor	Exd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection
Calculator	eMC Counter w/Pulse Interface
Hose	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved)
Nozzle	Automatic ZVA2 or Others
Fuel Types	Petrol Diesel Biodiesel Ethanol (E85) (1) AdBlue (1)
Flow Rates	10, 40, 80, 130 L/min Up to 1 Products / 2 Hoses
Certificates	ATEX
(1) Only available with pressure pumps.	

OPTIONS		
- Speed Selector (40/80 L/min)	- Three-Phase Motor	- Custom Nozzles and Sleeves
- Electro-mechanical Totalizers	- Fleet Management	- Flexible Riser Connection
- Volume Preset	- AdBlue Hydraulic Housing Heating (ATEX)	- Stainless Steel AISI304 Image Panel
- Circuit Breaker	- AdBlue Hydraulic Housing Heating	- Stainless Steel AISI316 Housing
- Electronics Head Heating	- Low Temperature Kit	- Foundation Frame
- Vapour Recovery Stage II (*)	- Satellite Ready	- Custom Corporate Image
- Single-Phase Motor	- Breakaway Couplings	- Hose Mast
(*) Only available with suction pumps.		

✓ AVAILABLE CONFIGURATIONS

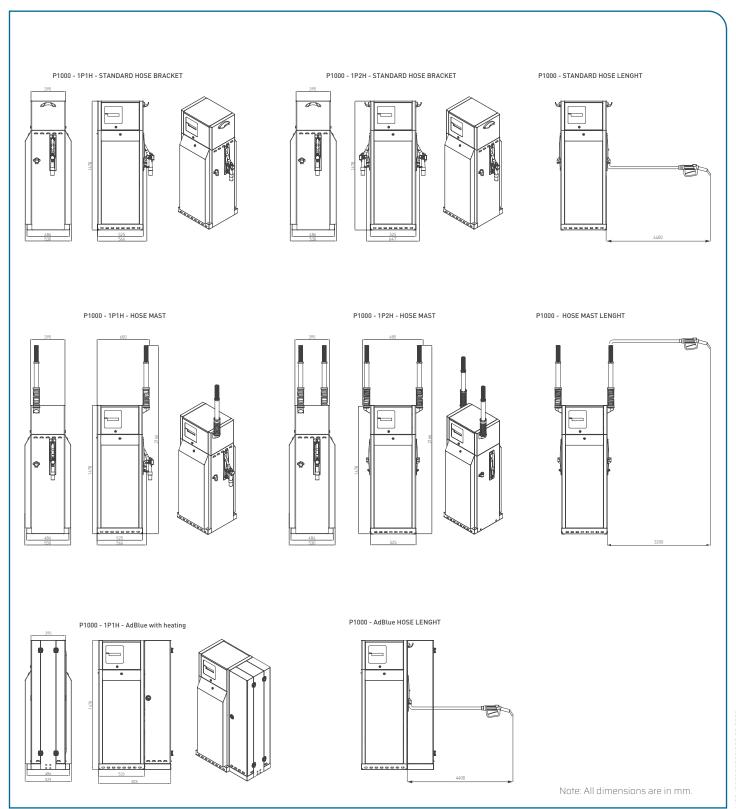

Petrotec Official Distributor



© 2018 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.









