


EUROTANK

DISPENSING
SOLUTIONS

Adblue III Compact

The Compact version is a true stand-alone solution, allowing a fast integration with your business. It is “ready-to-deploy”, with a really fast and simple installation and the same core features as the Eurotank AdBlue III.

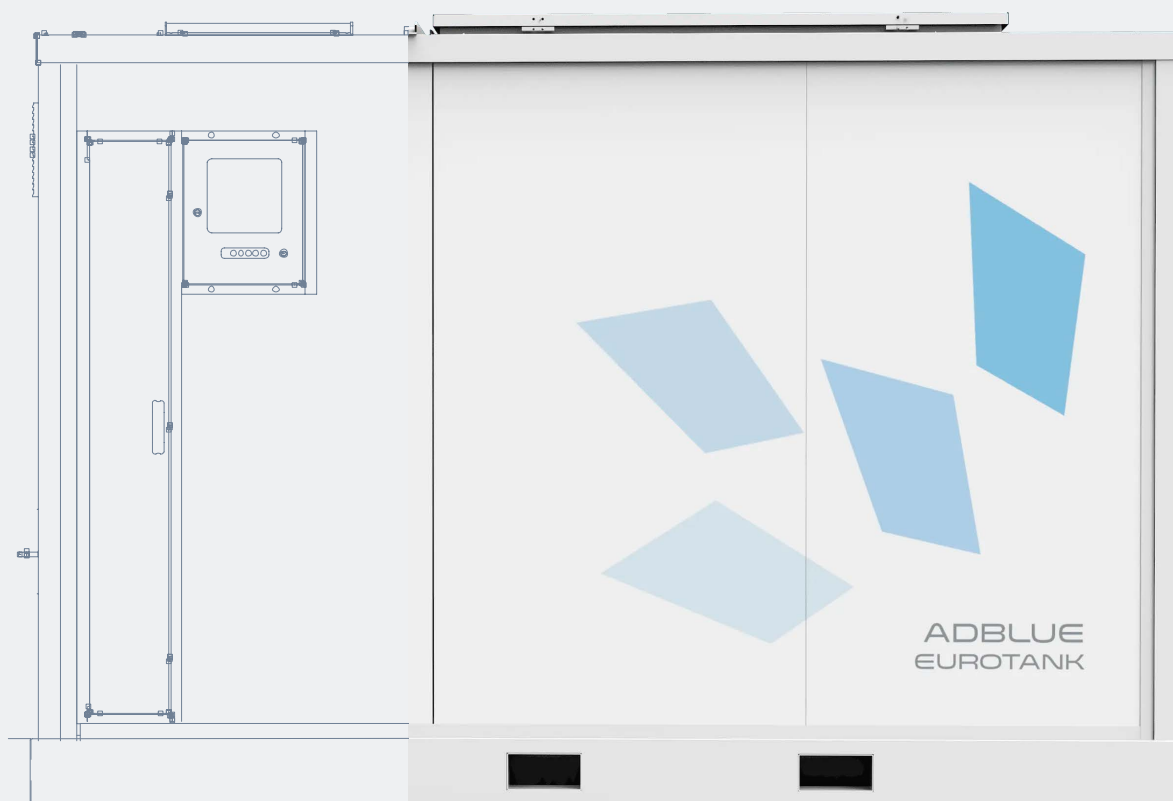

It has a storage capacity of up to 10000L, an integrated dispenser with one or two hoses and flow rates of 10L/min (LV) and 40L/min (HV). For those who need a fast response to their needs, an easy integration with all types of business and an inexpensive installation, the Petrotec “ready-to-go” compact AdBlue solution is the right choice.



Capacity

| | |
|--------|---------|
| 1000 L | 5000 L |
| 1500 L | 10000 L |
| 3000 L | |

Flow rate



| |
|---------------------------|
| 10 l/min (light vehicles) |
| 40 l/min (heavy vehicles) |

EASY INSTALLATION,
MAXIMUM STORAGE



Petrotec


TECHNICAL SPECIFICATIONS

| OPTIONS | FEATURES | |
|--|---|---|
| Breakaway couplings | Stainless steel submersible pump 0.55kw | Power supply 230V/50Hz |
| Heating system | Level indicator (L)3 | Main distribution electrical board |
| Stainless steel filling pipe | Forced ventilation with temperature control | High density polyethene tank |
| Over fill valve 1 | Flexible filling hose | PVC retention basin (650g/m²) |
| Corporate image | Guillemin 2" filling connector | Service door |
| TODO-Matic 2" filling connector | Positive displacement meter PTF, with pulse generator and integrated electronic calibration | Roof hinged access door |
| Veeder Root probes 2 | Volume and amount present | Reinforced roof frame (for maintenance) |
| Digital Internal Inventory Level Display | 1 or 2 fueling points | Reinforced base struture for easy transportation / Displacement / instalation |
| Pressure control valve (by-pass) | | Adaptation unit for Veeder Root probes |

- 1 Only available with rigid filling hose
2 Consoles not included
3 On duty, maximum level, intermedium level, minimum level

| DIMENSIONS | Volume | Length (A) | Width (B) | Height (C) | Weight | Coupling Dock (X) |
|-----------------------------------|---------|------------|-----------|------------|---------|-------------------|
| Eurotank Adblue III Compact | 1000 L | 1800 mm | 980 mm | 2440 mm | 600 kg | 840 mm |
| | 1500 L | 2540 mm | 1200 mm | 2150 mm | 800 kg | 1480 mm |
| | 3000 L | 3200 mm | 1200 mm | 2150 mm | 1000 kg | 1480 mm |
| | 5000 L | 2800 mm | 2200 mm | 2500 mm | 1420 kg | |
| | 10000 L | 4800 mm | 2200 mm | 2500 mm | 1850 kg | |

LAYOUT REPRESENTATION

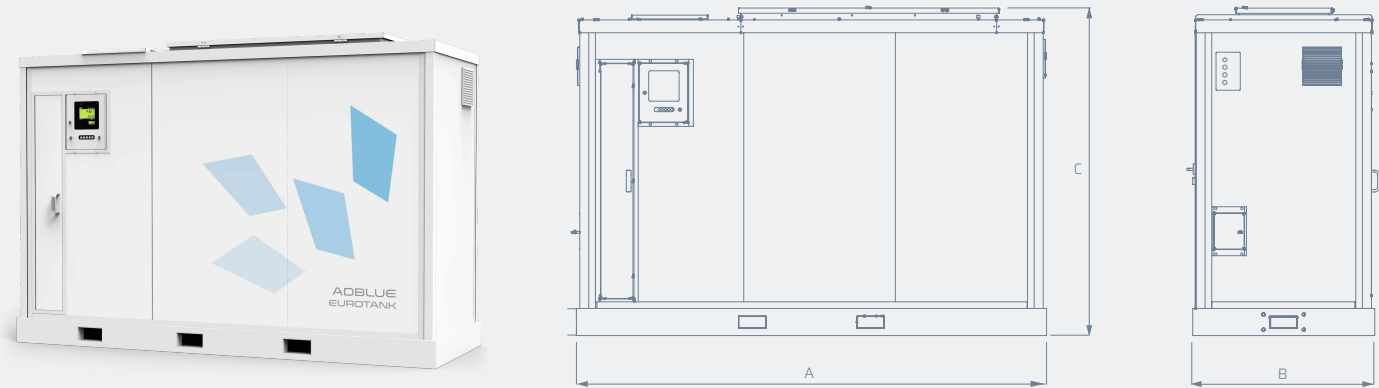

SERVICE DOOR LAYOUT*

