

EUROTANK

DISPENSING
SOLUTIONS

Adblue III

The Eurotank AdBlue III is a storage-focused solution with a capacity of up to 10000L and all the features required for the appropriate conservation of AUS32.

It can be combined with a coupled dispenser or connected to a remote unit in the forecourt. Its maintenance is simplified with an easy access to the interior via a service door and a reinforced roof frame.



A clean solution with a simple installation, low maintenance costs, and easily adaptable to your business.



Capacity

1500 L	5000 L
3000 L	10000 L

Flow rate



10 l/min (light vehicles)
40 l/min (heavy vehicles)

EASY INSTALLATION,
MAXIMUM STORAGE



TECHNICAL SPECIFICATIONS

OPTIONS	FEATURES	
Pressure control valve (by-pass)	Stainless steel submersible pump 0.55kw	High density polyethene tank
Anti-syphon valve	Level indicator (L)3	PVC retention basin (650g/m ²)
Heating steel filling pipe	Forced ventilation with temperature control	Service door
Overfill valve ¹	Flexible filling hose	Roof hinged access door
Corporate image	Guillemin 2" filling connector	Reinforced roof frame (for maintenance)
TODO-Matic 2" filling connector	Main electrical board	Reinforced base struture for easy transportation / Displacement / instalation
Veeder Root probes ²	Power supply 230V/50Hz	Adaptation unit for Veeder Root probes
Digital Internal Inventory Level Display		


1 Only available with rigid filling hose

2 Consoles not included


3 On duty, maximum level, intermedium level, minimum level

DIMENSIONS						
Volume	Length (A)	Width (B)	Height (C)	Weight	Coupling Dock (X)	
1500 L	1780 mm	1200 mm	2150 mm	760 kg	1480 mm	
3000 L	3200 mm	1200 mm	2150 mm	960 kg	1480 mm	
5000 L	2800 mm	2200 mm	2500 mm	1360 kg		
10000 L	4800 mm	2200 mm	2500 mm	1790 kg		

LAYOUT REPRESENTATION

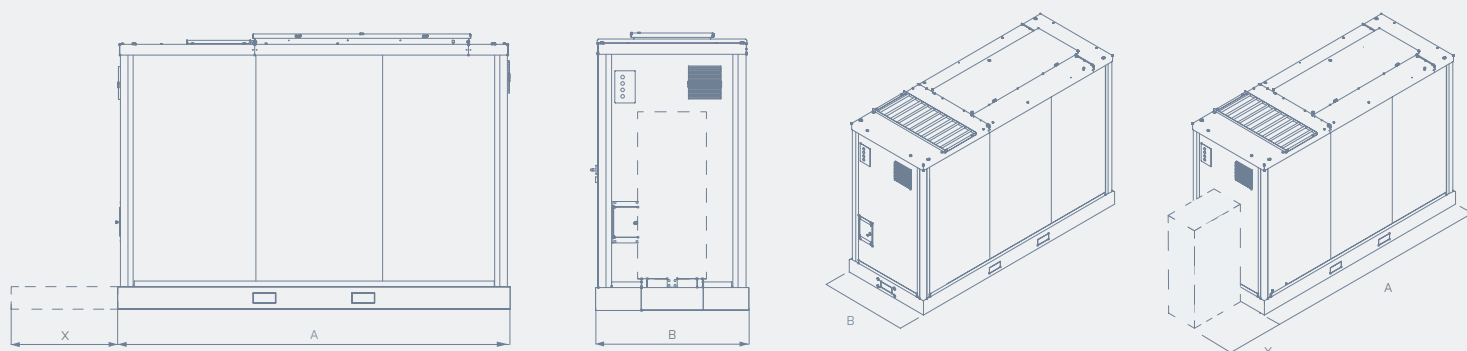

SERVICE DOOR LAYOUT*

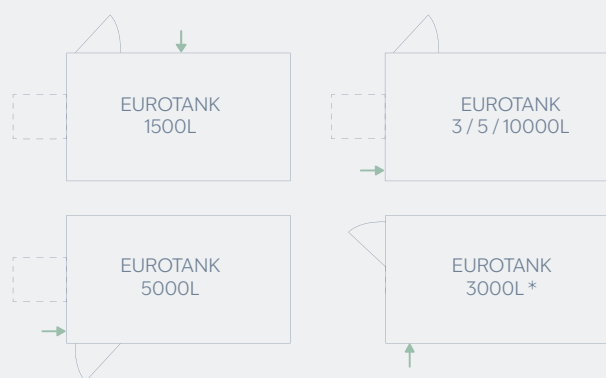

→ Loading Connection

(*) Only available without add-on base frame

