



# DISPENSING SOLUTIONS

## > PROGRESS 1000 R

### ✓ TECHNICAL SPECIFICATIONS


MAIN FEATURES	
Construction	Frame: Galvanised Steel; Double Coated Painting
	Housing: Stainless Steel
	Panels: Aluminium; Double Coated Painting
Admission	Suction: High Performance Compact Gear Pump RTF Pressure: Submersible Pump
Meter	Positive Displacement Meter PTF, with Pulse Generator and Integrated Electronic Calibration
Filters	Reusable Stainless Steel, 100 µm mesh
Motor	Eexd, Single/ Three-Phase, 50/60 Hz w/ Internal Thermal Protection
Display	Larger and brighter display, providing crisp digits under any lighting conditions. 7 digits for sale (31,75mm), 7 digits for volume and 6 digits for unit price
Calculator	eMC <sup>2</sup> Electronic Modular Calculator, 2nd Generation
Hose	Ø16, 19, 21, 25 mm (EN1360/EN13483) (VR2 Approved)
Nozzle	Automatic ZVA2 or Others
Fuel Types	Petrol   Diesel   Biodiesel   HVO   Ethanol (E85) <sup>(1)</sup>   AdBlue <sup>(1)</sup>
Flow Rates	10, 40, 80, 130 L/min   Up to 1 Product / 2 Hoses
Certificates	ATEX; MID
(1) Only available with pressure pumps.	

OPTIONS		
- Speed Selector (40/80 L/min)	- AdBlue Hydraulic Housing Heating (ATEX)	- Stainless Steel AISI316
- Electro-mechanical Totalizers	- AdBlue Hydraulic Housing Heating	- Foundation Frame
- Volume Preset	- Low Temperature Kit	- Custom Corporate Image
- Amount Preset	- Satellite Ready (1 per side)	- Hose Mast
- Circuit Breaker	- Breakaway Couplings	- Vapour Recovery Stage II
- Electronics Head Heating	- Custom Nozzles and Sleeves	- Vapour Recovery w/Monitoring
- Automatic Temperature Compensation	- Flexible Riser Connection	
- Single/ Three-Phase Motor	- Stainless Steel AISI304 Image Panel	


COMMUNICATION PROTOCOLS/INTERFACES		
- Petrotec	- IFSF IP	- HDX 2WI (Gilbarco)
- EP55	- IFSF Lon v1.xx (Converter)	- DART
- Pulse Interface	- IFSF Lon v2.xx	- Dunclare
- ER3	- HDX 485 (Gilbarco)	- Pumalan

# ✓ AVAILABLE CONFIGURATIONS


P1000 R - 1P1H - STANDARD HOSE BRACKET

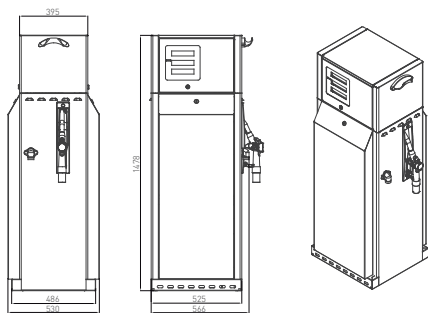


P1000 R - 1P2H - STANDARD HOSE BRACKET

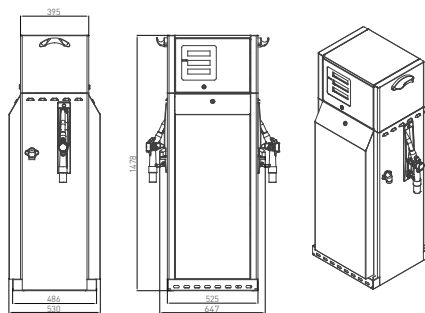


P1000 R - STANDARD HOSE LENGHT




P1000 R - 1P1H - HOSE MAST

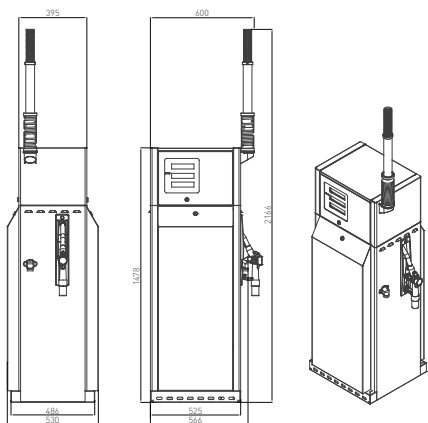


P1000 R - 1P2H - HOSE MAST

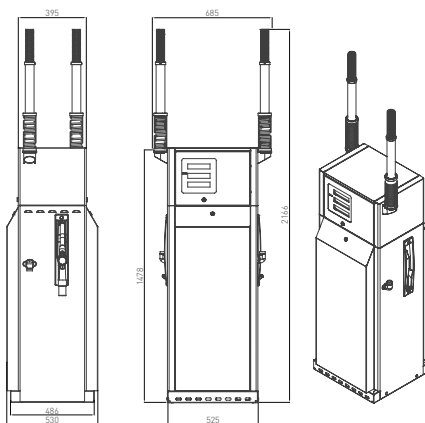


P1000 R - HOSE MAST LENGHT

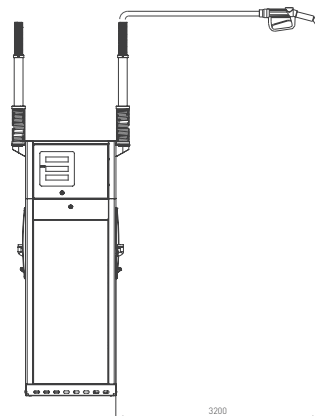

P1000 R - 1P1H - AdBlue with heating

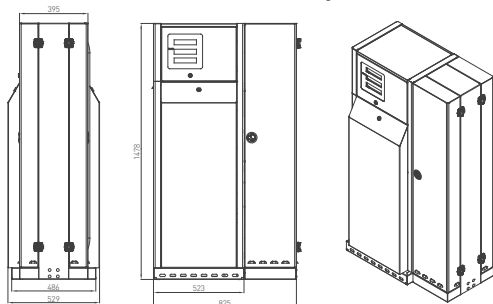

P1000 R - AdBlue HOSE LENGHT



Note: All dimensions are in mm.

© 2023 Petrotec Group | All rights reserved. Petrotec, the Petrotec logo, Progress and combinations thereof are registered trademarks of Petrotec Group. Other names are informational and may be trademarks of their respective owners. Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice. The imagery used may be indicative of style only. The available brochures are a guide and do not constitute an offer or contract.



**Petrotec**

[www.petrotec.com](http://www.petrotec.com)